

**live:cut**

Multicamera Workflow For Up To 16 Cameras



live:cut enables multicamera workflows for up to 16 cameras and reduces production time by eliminating time-consuming production steps. Part of every new just:in mac 2025 or just:in linux version 6.x license.

**Centralized Environment**

Ingest, metadata entry, live logging, media management and workflow automation are centralized in a single, easy-to-use application, namely Just Control.

**Suited For Your Scenario**

live:cut is suited for talk and game shows, soaps, sitcoms, live concerts, event recordings and many other scenarios.

**Low Cost, High Performance**

Available for flexible hardware setups (e.g. a Mac mini) live:cut is the ideal low-cost, low-space and energy efficient solution for OB-vans and other on-location multi-camera setups.

**Time Efficient**

Re-edits and post-production tasks can be performed while recording, speeding up your production process. Labels, markers and comments can easily be set during the recording.

**Ease Of Use**

Hassle-free operation: start and stop the multi-camera recording with a single button.

**Two Solutions – One Interface**

live:cut is integrated into just:in mac and just:in linux to accommodate up to 16 channels of multicamera ingest.

**Customize Your Flow**

Recorded takes are tracked, organized and ready to be opened and processed with qualified NLEs.

**Reduce Production Time**

As a built-in option to just:in, live:cut reduces the production time of your multi-camera productions.

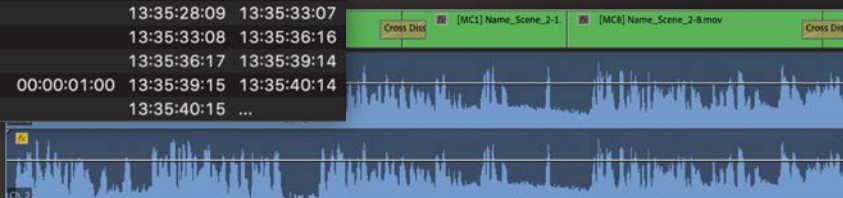
**Fast EDL Turnaround**

live:cut's realtime vision mixer's EDL can instantly be processed into a multicamera timeline using either Adobe Premiere Pro, Final Cut Pro or DaVinci Resolve.

**Easy Integration**

live:cut supports GPI-based EDL transmission (vision mixers), native Blackmagic Design ATEM devices as well as the TSL UMD (Ross) protocol.

					↓TC	TC↑
0003	6 → 1	D	00:00:01:00	13:35:14:13	13:35:15:12	
0004	1	C		13:35:15:13	13:35:18:15	
0005	8	C		13:35:18:16	13:35:23:19	
0006	8 → 1	D	00:00:01:00	13:35:23:20	13:35:24:19	
0007	1	C		13:35:24:20	13:35:28:08	
0008	6	C		13:35:28:09	13:35:33:07	
0009	5	C		13:35:33:08	13:35:36:16	
0010	7	C		13:35:36:17	13:35:39:14	
0011	7 → 3	D	00:00:01:00	13:35:39:15	13:35:40:14	
0012	3	C		13:35:40:15	...	

**System Requirements**

- Apple Mac mini, iMac, Mac Studio, Mac Pro (Apple silicon M1-M4).
- Apple macOS Ventura, macOS Sonoma, macOS Sequoia.
- For detailed system requirements please consult the online user manual or contact us.
- EDL conversion portions used in this solution are under license from the inventor, Evangelos D. Achilopoulos (GR) and internationally protected from the following patents: ATE391991T1; EP1634292A1; EP1634292B1; GR1004772B; GR20030100237A; JP2006529068A; US2007280632A1; WO2004105031A1.