

TOOLS  air

just: in linux



Linux-based Ingest Solution

up to 8 × UHD/4K or 2 × UHD2/8K

just: in linux is our enterprise-grade, network-based ingest solution for multi-channel recording. It unites the power of a macOS client with the scalability of a Linux-based backend.

Front View




LED Status Panel • 24 × 2.5" Drive Slots • 2 × USB 3.0 Connectors

Model	Drive Options	Capacity RAID 0	Capacity RAID 10	Dimensions	Weight
JIL4-12G* JIL8-12G**	0.96 TB	23.04 TB	11.52 TB	172 × 34 × 28.7 inch 438 × 87 × 730 mm (Width x Height x Depth)	57 lbs 26 kg (Gross)
	24 × 1.90 TB SSD	45.60 TB	22.80 TB		
	3.80 TB	91.20 TB (Gross)	45.60 TB (Gross)		

* up to 4x UHD/4K or 1x UHD2/8K
 ** up to 8x UHD/4K or 2x UHD2/8K

Back View

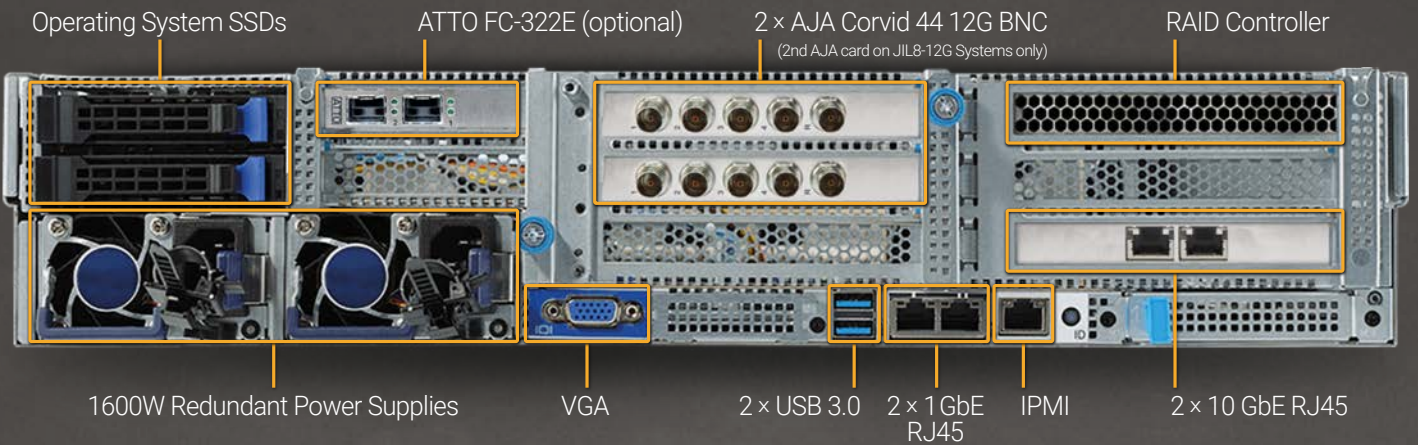

Containers/Codecs



QuickTime

NTSC | PAL | HD | UHD | 4K | UHD2 | 8K

- ProRes422, LT, Proxy and HQ
- H.264
- Photo JPEG
- Uncompressed 4:2:2



MXF

NTSC | PAL | HD | UHD | 4K

- IMX 30/40/50
- Uncompressed 4:2:2
- XDCAM EX, XDCAM HD, XDCAM HD422
- AVC-Intra 50M/100M
- DNxHD, DNxHR



MP4 / MPEG-TS

NTSC | PAL | HD | UHD | 4K

- H.264



AVI

NTSC | PAL | HD

- Uncompressed 4:2:2



Supported Frame Rates

- 23.976, 24, 25, 29.97, 30, 50, 59.94, 60
- Supported frame rates are container and codec specific

TOOLS  air

just: in linux



Linux-based Ingest Solution

up to 8 × HD or 2 × UHD/4K


just: in linux is our enterprise-grade, network-based ingest solution for multi-channel recording. It unites the power of a macOS client with the scalability of a Linux-based backend.

Front View



LED Status Panel • 4 x 3.5" Drive Slots

JIL 4

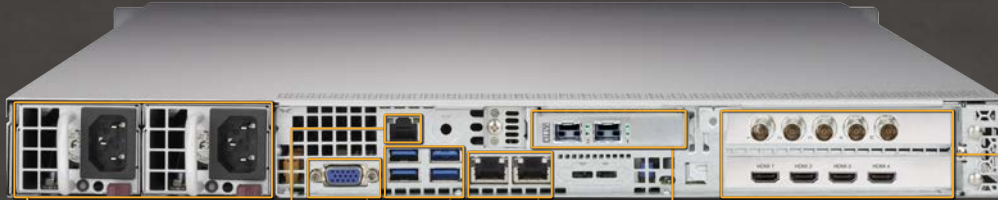

750W Redundant Power Supplies

IPMI

VGA

USB 3.0

2 x 10 GbE RJ45

ATTO Fibre Channel Card (optional)

AJA Corvid 44 BNC
or
AJA Kona HDMI

JIL 8



750W Redundant Power Supplies

IPMI

VGA

USB 3.0

2 x 10 GbE RJ45

ATTO Fibre Channel Card (optional)

AJA Corvid 88
or
AJA Kona IP

Technical Specifications

Model	Drive Options	Capacity RAID 0	Capacity RAID 10	Dimensions	Weight
JIL4-HDD* JIL8-HDD**	4 x 4 TB HDD 6 TB 8 TB	16 TB 24 TB 32 TB (Gross)	8 TB 12 TB 16 TB (Gross)	172 x 1.7 x 25.6 inch 437 x 43 x 650 mm (Width x Height x Depth)	46 lbs 21 kg (Gross)

* up to 4x HD or 1x UHD/4K

** up to 8x HD or 2x UHD/4K

Containers/Codecs



QuickTime

NTSC PAL HD UHD 4K

- ProRes422, LT, Proxy and HQ
- H.264
- Photo JPEG
- Uncompressed 4:2:2



MXF

NTSC PAL HD UHD 4K

- IMX 30/40/50
- Uncompressed 4:2:2
- XDCAM EX, XDCAM HD, XDCAM HD422
- AVC-Intra 50M/100M
- DNxHD, DNxHR



Supported Frame Rates

- 23.976, 24, 25, 29.97, 30, 50, 59.94, 60
- Supported frame rates are container and codec specific



MP4 / MPEG-TS

NTSC PAL HD UHD 4K

- H.264



AVI

NTSC PAL HD

- Uncompressed 4:2:2

TOOLS  air

just: in linux



Linux-based Ingest Solution

up to 8 x HD or 2 x UHD/4K


just: in linux is our enterprise-grade, network-based ingest solution for multi-channel recording. It unites the power of a macOS client with the scalability of a Linux-based backend.

Front View



LED Status Panel • 10 × 2.5" Drive Slots • 2 × USB 3.0 Connectors

JIL 4

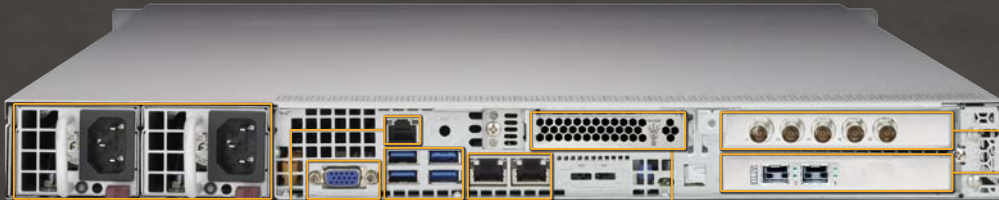

750W Redundant Power Supplies

IPMI

VGA

USB 3.0

2 × 10 GbE RJ45

RAID Controller

AJA Corvid 44 BNC

ATTO Fibre Channel Card (optional)

JIL 8



750W Redundant Power Supplies

IPMI

VGA

USB 3.0

2 × 10 GbE RJ45

RAID Controller

AJA Corvid 88

ATTO Fibre Channel Card (optional)

Technical Specifications

Model	Drive Options	Capacity RAID 0	Capacity RAID 10	Dimensions	Weight
JIL4-SSD* JIL8-SSD**	10 × 0.96 TB 1.90 TB 3.80 TB SSD	9.60 TB 19.0 TB 38.0 TB (Gross)	4.80 TB 9.50 TB 19.0 TB (Gross)	172 × 1.7 × 23.5 inch 437 × 43 × 597 mm (Width x Height x Depth)	46 lbs 21 kg (Gross)

* up to 4x HD or 1x UHD/4K

** up to 8x HD or 2x UHD/4K

Containers/Codecs



QuickTime

NTSC PAL HD UHD 4K

- ProRes422, LT, Proxy and HQ
- H.264
- Photo JPEG
- Uncompressed 4:2:2



MXF

NTSC PAL HD UHD 4K

- IMX 30/40/50
- Uncompressed 4:2:2
- XDCAM EX, XDCAM HD, XDCAM HD422
- AVC-Intra 50M/100M
- DNxHD, DNxHR



MP4 / MPEG-TS

NTSC PAL HD UHD 4K

- H.264



AVI

NTSC PAL HD

- Uncompressed 4:2:2



Supported Frame Rates

- 23.976, 24, 25, 29.97, 30, 50, 59.94, 60
- Supported frame rates are container and codec specific